

Overview

12 Months Warranty

MANUFACTURED RANGE Floor Grilles

Description

For supply or return air, suitable for floor applications. Floor grilles are only available as fixed core in both 15 and 0 degree deflection. Available in natural anodised or any special colours upon request.

Construction

From extruded aluminium sections. Hairline mitres are mechanically held for maximum strength and durability. Blades are spaced at 9.1mm as standard, however also available in 6mm upon request. Round spacers form the mullions for support between the blades. Angles are welded at the back of the grille for extra strength and support.

| PRODUCT CODE | DESCRIPTION |
|--------------|--------------|
| FG | Floor Grille |



Note:

- Made to order, custom sizes and colours are available
- Stocked sizes are available, see pages 54 - 55
- [Performance data is currently not available for this product](#)



QAE strive to provide products that best suit the market's requirements. As such, QAE reserve the right to supply products which may differ slightly from those shown in this and other publications. For product warranties please refer to our standard terms and conditions.

Floor Grille: FG

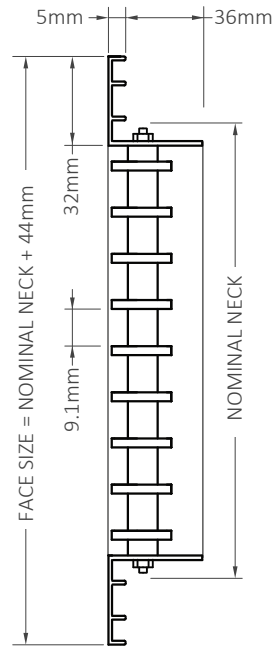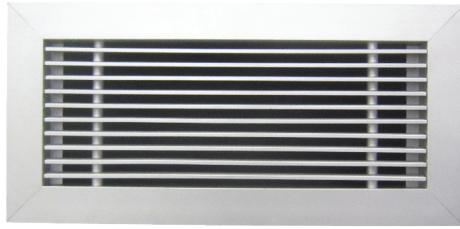

**FIELDS REQUIRED
PRIOR TO ORDERING**

| | |
|-------------------------------|------------|
| Quantity | |
| Width (W) (Blade length) | |
| Height (H) | |
| Exact Neck X Exact Bolts | Choose One |
| Nominal Neck/ Cut Out Size | |
| Face Size | |
| 0 Degree Deflection | Choose One |
| 15 Degree Deflection | |
| With Filter | Choose One |
| Without Filter | |
| White | Choose One |
| Natural Anodised | |
| Special Colour | |
| Mill Finish | |



FG in application

Related Products for Floor Grilles

| UB | SB | EB | ALPBM | ALPBF | OBD |
|------------|------------|------------|------------|------------|-----------|
| | | | | | |
| see pg.266 | see pg.266 | see pg.266 | see pg.227 | see pg.226 | see pg.68 |